

Siemens Nixdorf Scenic Mobile 500

The **Siemens Nixdorf Mobile Scenic 500** comes standard with 8Mb memory soldered. It can be expanded to a maximum of 40Mb by installing the following Viking Components memory options into its two available expansion slots.


Description	Viking P/N
8Mb Upgrade Kit*	SN115L1, RSN115L1
16Mb Upgrade Kit*	SN115L2, RSN115L2
32Mb Upgrade Kit*	SN115L3, RSN115L3

INSTALLATION INSTRUCTIONS:

1. Turn the computer off and disconnect the AC power supply and any other cables from the unit.

Note: If the unit appears to be powered down, ensure that it is not in Suspend mode.


2. Turn the computer upside-down. Remove the battery from the system. If you are not familiar with this procedure, please refer to your computer's "Owner's Manual."
3. Locate the memory expansion cover on the right-side of the bottom panel. Also locate the holding screws on the cover. Remove the two screws with a small Flat-bladed screwdriver. Then remove the cover by lifting it up.

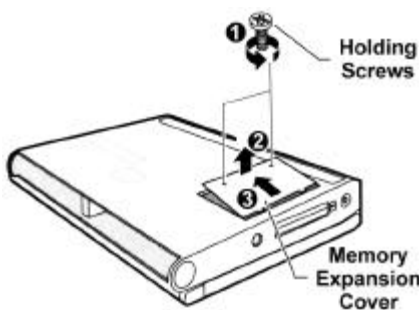

4. Locate the two memory expansion slots in the open compartment.




*Each kit consists of two memory modules. Memory modules must be installed in pairs.



Caution:

Electro Static Discharge (ESD) can damage electronic components. Before touching the memory module, ensure that you are discharged of static electricity by touching a grounded metal object.

5. To install the memory modules, insert the modules into the expansion slots at an angle and push them down until they click into place. To be certain that the modules are installed correctly, ensure that the notches on the modules are aligned with the keys on the connectors.

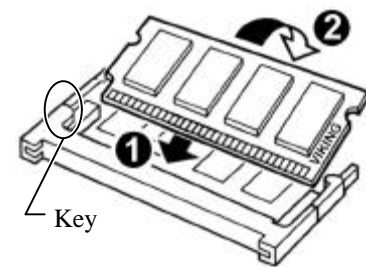

6. Replace the expansion cover and be sure to secure its two holding screws.
7. Replace the battery back into its compartment.
8. Turn the computer right-side up and replace the AC power supply and any other cables you may have disconnected.
9. Open the display screen and turn the system on. The computer will automatically reconfigure itself to recognize the newly added memory. The new memory can be verified during the POST routine at startup and at the SETUP utility.

The installation is now complete.

