


VIKING MEMORY

INSTALLATION GUIDE

CTX®

V Series EzBook V92C266

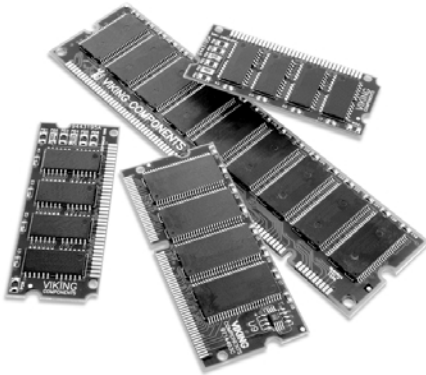

Manual No. 1005284 • Release 06/99, Rev. A

SPEED • POWER • PERFORMANCE®

The CTX V Series EzBook V92C66 comes standard with 32MB of removable memory. It can be expanded to a maximum of 128MB*† by installing the following Viking Components memory options into its two available expansion slots.

Description


16MB SDRAM Memory Module
32MB SDRAM Memory Module
64MB SDRAM Memory Module

Viking P/N

CTX016, RCTX016
CTX032, RCTX032
CTX064, RCTX064

*Requires removal of the standard memory module.

†The first 2MB of system memory is utilized for video memory. This 2MB is subtracted from the amount of total memory installed. System will count up to 126MB for the maximum.

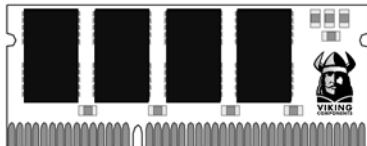


Caution:

Electro Static Discharge (ESD) can damage electronic components. Before touching the memory module, ensure that you are discharged of static electricity by touching a grounded metal object.

INSTALLATION INSTRUCTIONS:


1. Turn the computer off and disconnect the AC power supply and any other cables from the unit.

Note: If the unit appears to be powered down, ensure that it is not in Suspend mode.

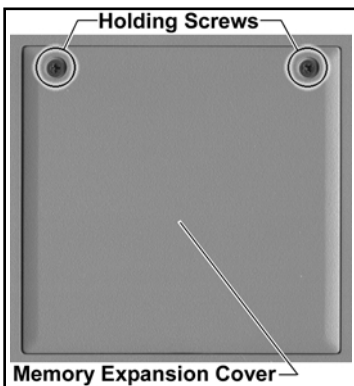



2. Turn the computer upside-down. Remove the battery from the system. If you are not familiar with this procedure, please refer to your computer's "Owner's Manual."

3. Facing the front of the computer, locate the memory expansion cover on the right side of the bottom panel. Also locate the two holding screws on the top of this cover. Remove the two screws with a small Phillips screwdriver. Then remove the cover by lifting it toward you.

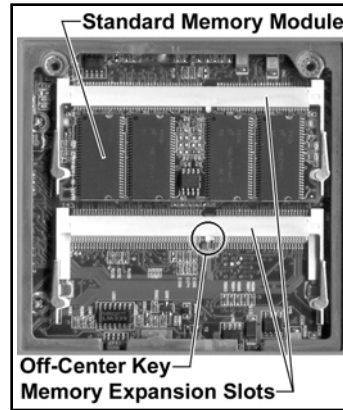

4. Locate the two memory expansion slots in the open compartment. Also locate the off-center key on each of the expansion slots. There will also be a standard memory module occupying one of the slots. If you wish to expand your system to its maximum amount of memory, the standard memory module will need to be removed. To remove a memory module before upgrading, please proceed to step 5. If you do not need to remove a module at this time, please proceed to step 6.

5. To remove a memory module, locate the retaining clips on both sides of the memory module. Gently pull both clips away from the module, then lift the module out of its expansion slot.

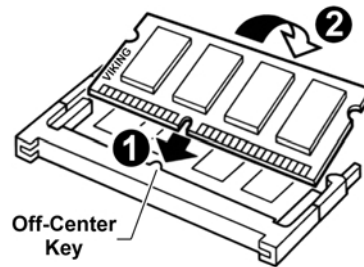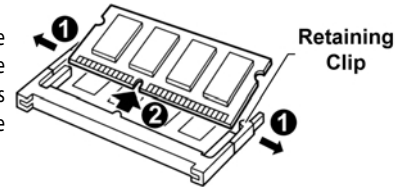

6. To install a memory module, insert the module into an expansion slot at an angle and then push it down until it clicks into place. To be certain that the module is installed correctly, ensure that the off-center notch on the module is aligned with the off-center key of the expansion slot. The module can only be installed one way due to the position of the notch.

6. Replace the memory expansion cover back to its original position and be sure to secure its two holding screws.

7. Insert the battery back into its compartment and turn the system right side up.

8. Replace the AC power supply and any other cables you may have disconnected.

9. Open the display screen and turn the system on. The computer will automatically reconfigure itself to recognize the additional memory. The new memory can be verified during the POST routine at start-up and at the SETUP utility.

The installation is now complete.

WARRANTY & DISCLAIMERS:

All Viking Components products have been thoroughly tested free of defects in material and workmanship. If any malfunction should occur while using one of our products in its recommended environment, Viking, at its option, will repair or replace the product at no charge, provided the product or any part thereof has not been abused, misused, neglected, replaced, repaired or modified. Viking shall make the final determination as to the existence and the cause of any defect. Viking will not repair or replace products designated as having a "Limited Lifetime" which fail solely because their estimated life has expired. No warranty is made with respect to customer products produced to original purchaser specifications except as specifically stated in writing by Viking.

All shipping costs shall be the responsibility of the purchaser.

Except as provided herein, there are no express or implied warranties of merchantability or fitness for a particular purpose. Under no circumstances will Viking Components be liable in any way to the purchaser for any damages, including but not limited to lost revenue, lost wages, or any other incidental or consequential damages arising out of the use of or inability to use this product. Viking reserves the right to make modifications in both hardware and software without prior notifications.

All Viking Components are 100% guaranteed compatible with the OEM machines for which they are designed. All OEM's names, trademarks and part numbers are used for identification purposes only, and in no way imply that any of our products are original equipment parts.

CTX and EzBook are registered trademarks of CTX International, Inc.

Product names mentioned herein may be trademarks or registered trademarks of their respective companies.